




QM-PROWRPPAD: Professional high speed matte polypropylene w/permanent adhesive and anti-slip PET liner

Specifically designed to work with high speed printers and legacy printers with worn pinch rollers. PROWRPPAD has an instant dry, bright white matte water resistant coating. The PET anti-slip liner helps keep production moving at high speeds. Our coating accepts high ink loads for cleaner, crisp details, with a new and improved adhesive that gets more aggressive over time. Use for any flat-mounted applications.

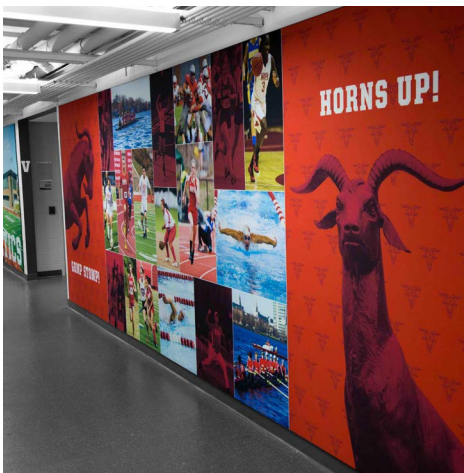

Benefits:

- Water Resistant
- Smooth Non-Glare Finish
- Tear Resistant
- Fast Dry Times

Applications:

- Board Applications
- Window Signage
- Packaging Prototypes
- Event Graphics

Registered Latex Developer



TECHNICAL DATA: QM-PROWRPPAD – PROFESSIONAL HIGH SPEED MATTE POLYPROPYLENE W/ PERMANENT ADHESIVE AND ANTI-SLIP PET LINER

SURFACE FINISH:	Matte	WHITENESS:	95 (CIE Ganz)
BASE MATERIAL:	Polypropylene	OPACITY:	96
ADHESIVE:	Permanent Clear Acrylic	DURABILITY:	Indoor: Up to 1 year Outdoor: 6 months
LINER WIEGHT:	75 GSM +/- 10%	ROLL LENGTH:	100 FT.
LINER THICKNESS:	3 Mil +/- 1	ROLL WIDTHS:	36"
FACE STOCK WEIGHT:	103 GSM +/- 10%	CORE:	3"
FACE STOCK CALIPER:	6 Mil	PRINT SIDE:	Print Side Out
BRIGHTNESS:	108 (ISO Blue Whiteness)	INK RECOMENDATIONS:	AQUEOUS UV LATEX



This media is designed for digital printing applications using OEM printers with their accompanying OEM ink sets. Although designed for all printers using the aforementioned OEM matching ink sets; actual results may vary depending on printer model, age, print design, environmental conditions, and other factors. Exposure of a print to atmospheric pollutants, or to temperature, humidity, and / or lighting extremes can result in fading, color shifting, or other visual changes. The ideal conditions for printing and storage are a temperature of 70°F ±5°F and relative humidity of 50% RH ±3% RH. Our wide format media is guaranteed against manufacturing flaws and defects and is designed to resist printer jams when used properly. Storage: Up to one year if stored in proper conditions (cool, dry place 50-80°)